

MST

BAMBINO SIDELINER

LAVADORA HUEVOS QUE FUNCIONA


AL LADO DE LA LINEA TRANSPORTADORA

(La alternativa a BAJO COSTO al lavado EN LINEA)

ESPECIFICACIONES

Nota: (altura del huevo que con el dibujo - o a la especific. del transportador)

El cliente puede seleccionar la velocidad de la cinta más adecuada.

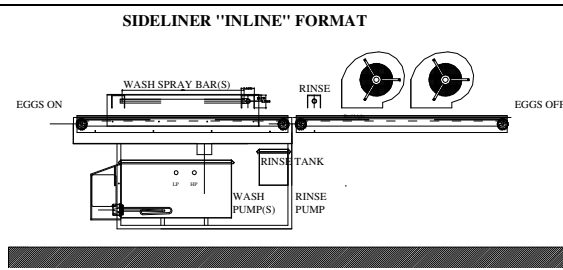

MODELOS	SIDELINER 1 & "5000"	SIDELINER II	SIDELINER III	SIDELINER IV	SIDELINER V
HUEVOS (por hora nom)	Huevos crianza / Huevos de mesa	Huevos de mesa	Huevos de mesa	Huevos de mesa	Huevos de mesa
Pollos	2,000	4,000	4,000 - 6,000	12,000	16,000
Pato/Pavo	1,500	3,000	3,000 - 4,500	9,000	N/A
Avez de caza *	4,000	N/A	N/A	N/A	N/A
DIMENSIONES **	EN LINEA [2" M 180 sistem]	EN LINE [2" M 180 sistem]	EN LINEA [6" M 180 sistem]	EN LINEA [6" M 180 sistem]	EN LINEA [6" M 180 sistem]
Largo cm/inch	260cm./102" [185cm./65"]	310cm/122" [193cm/76"]	380cm/150" [204cm/80"]	380cm/150" [240cm/95"]	380 cm/150" [240cm/95"] 410cm / 162" ***
Ancho	61cm/24" [100cm/40"]	61cm/24" [100cm/40"]	61cm/24" [100cm/40"]	76cm/30" [114cm/45"]	76cm/30" [114cm/45"]
Alto min @egg level	90cm/35.5" [95cm/37.5"]	90cm/35.5" [95cm/37.5"]	90cm/35.5" [95cm/37.5"]	90cm/35.5" [95cm/37.5"]	90cm/35.5" [95cm/37.5"]
Para envío- M/imp	3.0m3/160kg-110cu.ft/355lbs	3.5m3/180kg-125cu.ft/400lbs	3.5m3/180kg125cu.ft/400lbs	4m3/210kg140cu.ft/460lbs	4m3/210kg140cu.ft/460lbs
REQ. ENERGIA E.U.	220-240v/50hz/60amp	220-240v/50hz/60amp	220-240v/50hz/90amp	220-240v/50hz/90amp	220-240v/50hz/120amp
U.S.A.	AC 2x110v/60hz/30amp	AC 2x110v/60hz/30amp	AC 2x110v/60hz/45amp	AC 2x110/60hz/45amp	AC 2x110/60hz/60amp
CAPAC TANQUE LTR / US GALL	Lavado -53 ltr./14gls. Enjuague/Sanidad - 15ltr/4gls	Lavado - 96 ltr./14gls. Enjuague/Sanidad - 5ltr/4 gls	Lavado - 134 ltr./ 25 gls Enjuague/Sanidad -15ltr/4 gls	Lavado - 134 ltr./ 25 gls Enjuague/Sanidad - 15ltr/4gls	Lavado - 134 ltr./ 25 gls Enjuague/Sanidad - 15ltr/4gls
BOMBA LAVADO	1	2	3	3	4
CALENTADOR(S) @ 3kw	(Lavado x 2) (Enjuag x 1)	(Lavado x 2) (Enjuag x 1)	(Lavado x 3) (Enjuag x 1)	(Lavado x 3) (Enjuag x 1)	(Lavado x 3) (Enjuag x 1)
QTY - INYECTOR	Lavado 30 - Sanidad 2	Lavado 40 - San. o Enjuag 2	Lavado 52 - San. o Enjuag 2	Lavado 78 - San. o Enjuag 3	Lavado 78 - San. o Enjuag 3
PRES INYECTOR	1.25 bar/18 psi	1.25 bar/34 psi	1.25 bar/27psi	1.25 bar/27psi	1.25 bar/27psi
VELOC TRANSP (or pre order)	100cm./min. 40"/min - 5rpm (or pre order @ 2.5rpm)	200cm./min.80"/min - 5rpm (or pre order @ 2.5rpm)	200cm./min. 80"/min- 10rpm (or variable - UPGRADE)	Variable speed	Variable speed
VENTILADOR / 'OFF' LENGTH	2 vent secadores / 135cm - 54"	2 vent secadores / 152cm - 60"	2 vent secadores /152cm-60" or 72"@180 (+opción ventil extra)	3 vent secadores / 152cm - 72"	4 vent secadores /152cm - 72/84" *** opción 84" OFF
OPCIONES					
Válvula de llenado Electrónica	SI	SI	SI	SI	SI
Sección aceitado - después del secado	NO	SI (+ 0.9M lg off end) Transportador separado	SI (+ 0.9M lg off end) Transportador separado	SI (+ 0.9M lg off end) Transportador separado	SI (+ 0.9M lg off end) Transportador separado
Extension Transport.	SI	SI	SI	SI	SI
Opción Graduadora	SI	SI	SI	SI	SI

Rodillo HUEVOS	X 2 (50-60% egg volume)	X 2 (50-60% egg volume)	X 2 (50-60% egg volume)	X 3 (50-60% egg volume)	X 4 (50-60% egg volume)
Control de veloc variable transportador	SI	SI	SI	INCLUSIVO (GLAD – 0-25 RPM VAR)	INCLUSIVO (GLAD – 0-25 RPM VAR)
Químicos Requeridos	CHLORWASH/ANTI ESPUM/QUAT800	CHLORWASH/ ANTI ESPUM	CHLORWASH/ ANTI ESPUM	CHLORWASH/ ANTI ESPUM	CHLORWASH/ ANTI ESPUM

* Eggs from some game birds require special conveyor belting – Please enquire prior to ordering. ** Dimensions in brackets refer to 180° format. *** Inline machine with 12” longer off conveyor
NOTE: DRYING FANS are wired to local supply and not via MST main control system..

All machines in this range mounted on stand & complete with Wash and Rinse and blow driers Ref:MS190407